


GSX 40000C-3D Type

Grades	Coating	Structural Steel	Carbon Steel	Alloy Steel	Pre-hardened Steel	Tempered Die Steel	Hardened Steel	Stainless Steel	Ti Alloy / Heat Resistant Alloy	Cast Iron	Al Alloy	Cu Alloy	Graphite
Grades	Coating	○	○	○	○	○	○	○	○	○	○	○	○

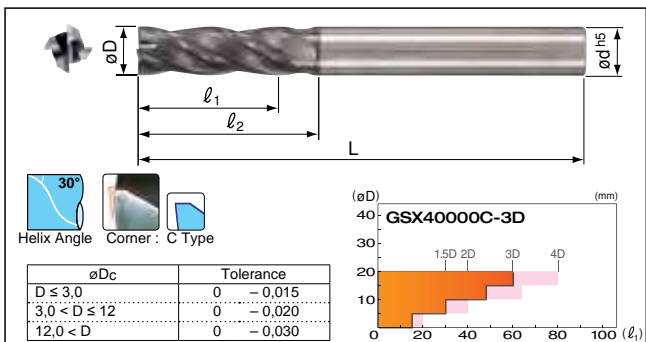

Grade: ACF20

Endmills

Cat. No.	Stock	øD	l ₁	l ₂	L	ød
GSX 40100C-3D	●	1,0	3,0	4,0	40	4
GSX 40150C-3D	●	1,5	4,5	5,5	40	4
GSX 40200C-3D	●	2,0	6,0	7,0	40	4
GSX 40250C-3D	●	2,5	7,5	8,5	40	4
GSX 40300C-3D	●	3,0	9,0	10,5	50	6
GSX 40400C-3D	●	4,0	12,0	13,5	50	6
GSX 40500C-3D	●	5,0	15,0	17,0	50	6
GSX 40600C-3D	●	6,0	18,0	-	50	6
GSX 40800C-3D	●	8,0	24,0	-	70	8
GSX 41000C-3D	●	10,0	30,0	-	90	10
GSX 41200C-3D	●	12,0	36,0	-	90	12
GSX 41600C-3D	●	16,0	48,0	-	110	16
GSX 42000C-3D	●	20,0	60,0	-	120	20

Endmill Identification (GSX MILL Series)


GSX 4 0100 C - 2D/3D

- ① Series Code
- ② No. of Teeth
- ③ Diameter
- ④ Cutting Edge
- ⑤ Cutting Length

(S: Sharp Edge
C: Gash Land Drilling)

Recommended cutting conditions

- For stable machining performance use rigid, high-precision machines and holders.
- Use air blowing when dry machining.
- Use wet machining for stainless steel, heat resistant alloy, and titanium alloy applications.
- In rear cases, chattering may occur in early milling stages, dissipating after 2m of cutting.
- If chattering is a problem, reduce the spindle speed and feed rate indicated in the table below by the same ratio, or reduce the depth of cut.
- If the machine cannot achieve the recommended spindle speed, please use the max. spindle speed available.



Shoulder Milling

Work Material	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
øD (mm)																
1,0	21.000	360	21.000	360	21.000	360	19.000	220	13.000	140	9.000	90	10.500	90	9.000	65
2,0	10.500	360	10.500	360	10.500	360	9.600	290	7.500	180	4.500	110	5.200	120	4.500	85
4,0	5.200	500	5.200	500	5.200	500	4.800	370	4.000	280	2.250	150	2.600	160	2.250	100
6,0	3.500	560	3.500	560	3.500	560	3.200	400	2.700	300	1.500	160	1.700	170	1.500	120
8,0	2.600	520	2.600	520	2.600	520	2.400	400	2.000	300	1.100	160	1.300	170	1.100	120
10,0	2.100	500	2.100	500	2.100	500	1.900	400	1.600	300	900	160	1.000	160	900	120
12,0	1.750	500	1.750	500	1.750	500	1.600	400	1.350	300	750	150	850	160	750	120
16,0	1.300	420	1.300	420	1.300	420	1.200	330	1.000	260	550	120	650	140	550	100
20,0	1.050	380	1.050	380	1.050	380	950	290	800	230	450	110	500	120	450	90
Shoulder cutting	2,5 D								2,0 D							
W _{sc}	øD < 3: 0,05 D , 3 ≤ øD < 8: 0,1 D , 8 ≤ øD: 0,15 D								0,02 D							

Grooving

Work Material	Structural Steel		Carbon Steel (150 to 250HB)		Cast Iron		Alloy Steel (25 to 35HRC)		Tempered Steel, Hardened Steel (35 to 45HRC)		Hardened Steel (45 to 55HRC)		Stainless Steel		Heat Resistant Steel, Titanium Alloy	
	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)	Spindle Speed (rpm)	Feed Rate (mm/min)
øD (mm)																
1,0	16.600	140	16.600	140	16.600	140	15.500	100	10.500	100	7.500	70	9.400	60	3.750	20
2,0	9.500	160	9.500	160	9.500	160	9.000	180	6.200	120	4.500	90	5.200	80	2.250	30
4,0	5.200	160	5.200	180	5.200	180	4.800	160	3.400	110	2.200	65	2.600	70	1.250	25
6,0	3.500	160	3.500	200	3.500	200	3.200	160	2.550	120	1.500	65	1.700	70	950	25
8,0	2.600	160	2.600	200	2.600	200	2.400	160	1.900	120	1.100	65	1.300	70	700	25
10,0	2.100	160	2.100	200	2.100	200	1.900	160	1.500	120	900	65	1.000	70	550	25
12,0	1.750	160	1.750	200	1.750	200	1.600	160	1.250	120	750	65	850	70	450	25
16,0	1.300	160	1.300	200	1.300	200	1.200	160	950	120	550	65	650	70	350	25
20,0	1.050	160	1.050	200	1.050	200	950	160	750	120	450	65	500	70	280	25
Grooving	0,1 D		0,2 D				0,05 D				0,1 D					

● = Euro stock